



DRIVER INSTALLATION INSTRUCTIONS

RAZER BLADE 15" (2018) BASE MODEL REALTEK LAN DRIVER
V10.28.615.2018

DRIVER INSTALLATION INSTRUCTIONS

APPLICABLE MODEL NUMBERS

- RZ09-02705

DRIVER NAME AND VERSION

Realtek LAN Driver v10.28.615.2018

INSTRUCTIONS

Note: This download is for the original driver that was installed on your Razer Blade Laptop. Updates for this driver are available via standard Windows Updates. To ensure you have the latest driver installed on your Blade please make sure to apply all available updates from Windows.

Please follow the instructions below to download and install the original driver for your Blade. Following the installation, it is recommended to search for any available Windows Updates.


- Ensure your Blade is plugged into a wall outlet and not running on battery alone before proceeding.
- Please save any open documents on your computer and close all other programs before attempting this update.
- Download the driver from the link below. You will need to right click the .zip folder and choose to extract the files to a location of your choosing (such as your desktop) to locate the files for the installation process.

<http://rzt.to/SZgkZ>


- Once you have extracted the file proceed to the installation steps below.

INSTALLATION PROCESS


1. To initiate the installation process, click on the setup.exe (Application) as shown in the image below:

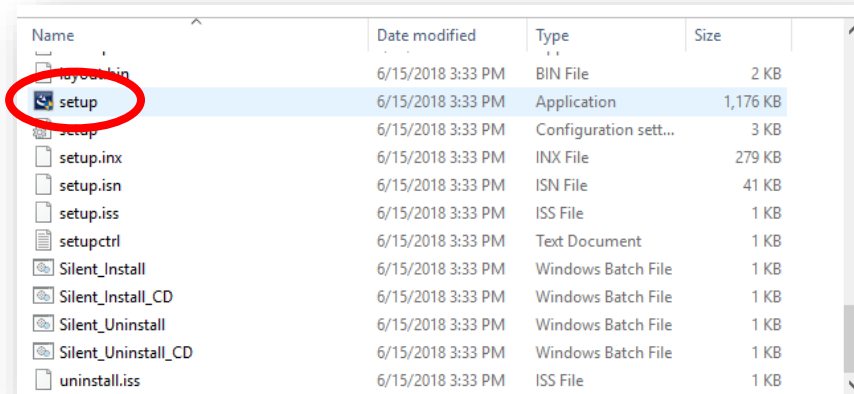

2. Upon clicking the setup.exe (Application), you will be prompted to confirm changes to your system by the User Account Control. Click 'Yes' in the User Account Control to continue and you will be met by the Realtek Ethernet Controller Driver where you will have the choice to Modify, Repair, or Remove the software and features. In this example, we are going to choose 'Repair' followed by clicking 'Next'.

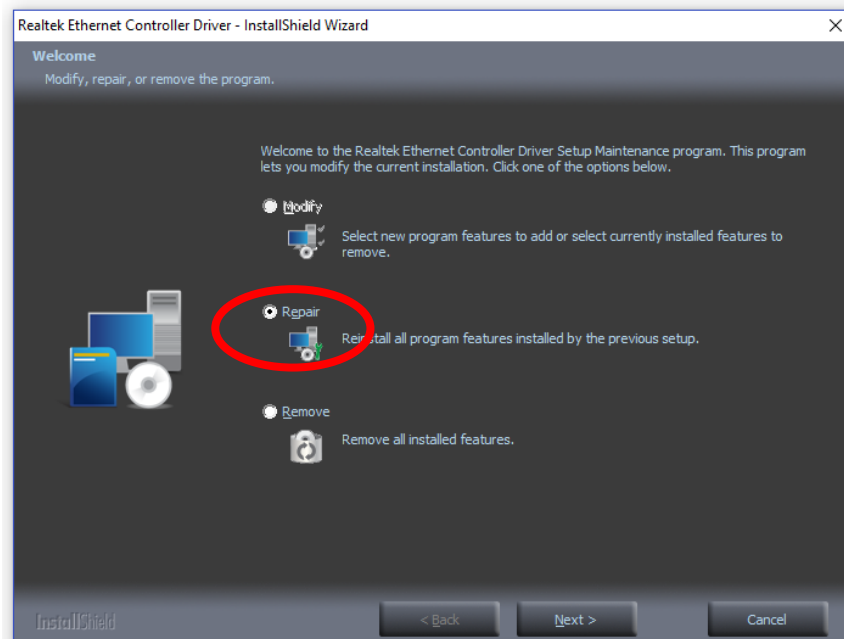

3. A progress bar will appear for a moment. Once finished, you will see the 'Maintenance Complete' message on your screen, and you may click 'Finish' to complete the install process as shown in the image below:

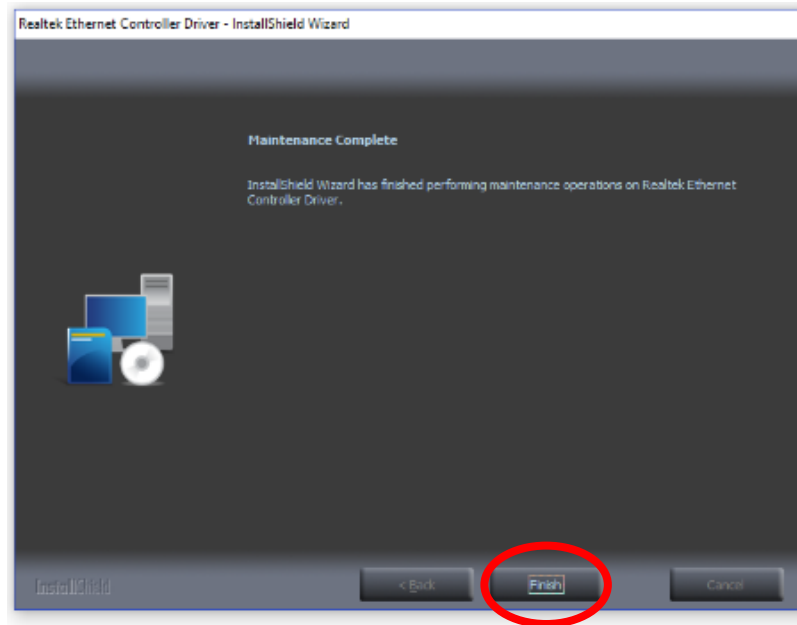

4. End